


## SPECIFICATIONS

|                      |                                                                         |
|----------------------|-------------------------------------------------------------------------|
| Dimensions           | Length: 1213 mm<br>Width: 176 mm<br>Thickness: 4(0.55)mm                |
| Box                  | 12 planks<br>2.562 sqm<br>20.81 kg                                      |
| Pallet               | 50 boxes                                                                |
| Unique planks        | Amaro and Angliano: 10 planks<br>Granica, Lakrima and Muskat: 20 planks |
| Surface              | Natural embossed                                                        |
| Wear class           | Intensive commercial use (class 33)                                     |
| Standard colours     | Muskat, Lakrima, Granica, Angliano and Amaro                            |
| Bevel                | 4V bevel                                                                |
| Gloss                | 5 %                                                                     |
| Locking system       | Tight lock click system                                                 |
| Type of installation | Floating                                                                |

## STRUCTURE

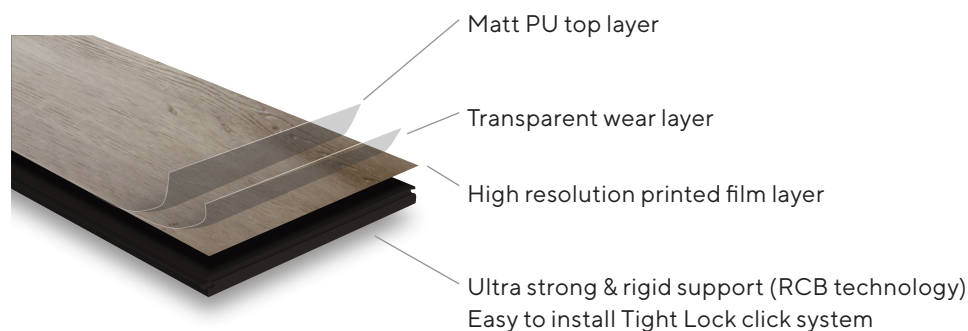

## INSTALLATION



## PRODUCT CHARACTERISTICS - General

|                        |                                          |
|------------------------|------------------------------------------|
| Factor                 | Standard - EN 14041:2004 + AC:2006       |
| Reaction to fire       | Bfl-S1                                   |
| Volume mass density    | 2014 kg/m <sup>3</sup>                   |
| Formaldehyde emission  | E1                                       |
| PCP                    | < 0.5 ppm                                |
| Slipperiness           | DIN 51130: R9<br>EN 13893: DS            |
| Thermal resistance     | 0,03 m <sup>2</sup> K/W                  |
| Thermal conductivity   | 0,07 W/(m.K)                             |
| Wear resistance        | Group T                                  |
| Resistance to staining | Result 1                                 |
| Surface strength       | -                                        |
| Floorheating           | Allowed, according to specific standards |